Anura Batten Light Range

Commercial Series



FEATURES

- Optional Emergency kit (2W 3hrs/3W 3hrs)
- 50,000hrs lifespan
- Optional integrated microwave (daylight/ motion) sensor
- CCT Colour Selectable Switch
- Mounting Options: Ceiling mounted, Chain suspension or Wall mounted
- One-piece polycarbonate housing with one-piece polycarbonate lens
- IP65 & IK08 Ratings

tunable | 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**

Anura Batten Light Range

Commercial Series

LUMINAIRE SPECIFICATION

SKU	IK Rating	WATTAGE
TN-ANU-X	IK08	16-60W
Colour Temperature	CCT (3000K, 4000K, 5700K)	
Beam Angle	 120°	
IP Rating	IP65	
Fitting Colour	Grey	
Dimmable	On/Off, DALI	
Light Source	SMD 2835	
Efficiency (lm/w)	100lm/w	
CRI	80	


ORDER INFORMATION

	Wattage	Length (mm)	Options
TN-ANU-S	16W 32W 43W	600 1200 1500	Sensor EM
TN-ANU-D	30W 48W 60W	600 1200 1500	DALI

TECHNICAL SPECIFICATION

Driver Supplied	Integrated
Rated Voltage	220-240VAC 50-60Hz
Working Temp	25 ~ +60℃
in Rush Current	5A 50μs
Thermal Protection	C.5.a.
Body Material	Aluminium


Tunable Anura 600

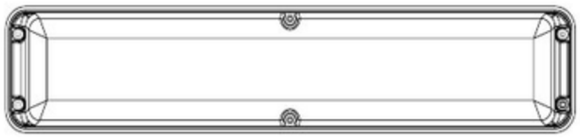

76mm

600mm


Tunable Anura 1200

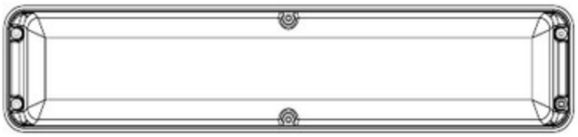

76mm

1220mm

Tunable Anura 1500

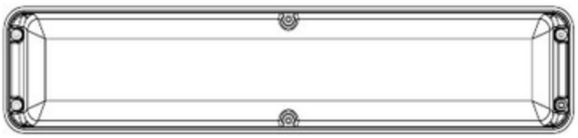

76mm

1520mm

STANDARDS COMPLIANCE

EN61347-1 • EN61347-2-13 • EN62384
EN55015 • EN61000-3-2 • EN61000-3-3 • EN61000-4-2,3,4,5,6,8,11 • EN61547
IEC 62386-101 • IEC 62386-102 • IEC 62386-207 • IEC 62386-209
IEC 61347-2- 13 Annex J • EN 60598-2-22 • EN 50172

5 YEARS WARRANTY
5% FAILURE RATE

tunable | 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**