
Bell Downlight Range

DT8 Colour Tuneable

Everyday Series

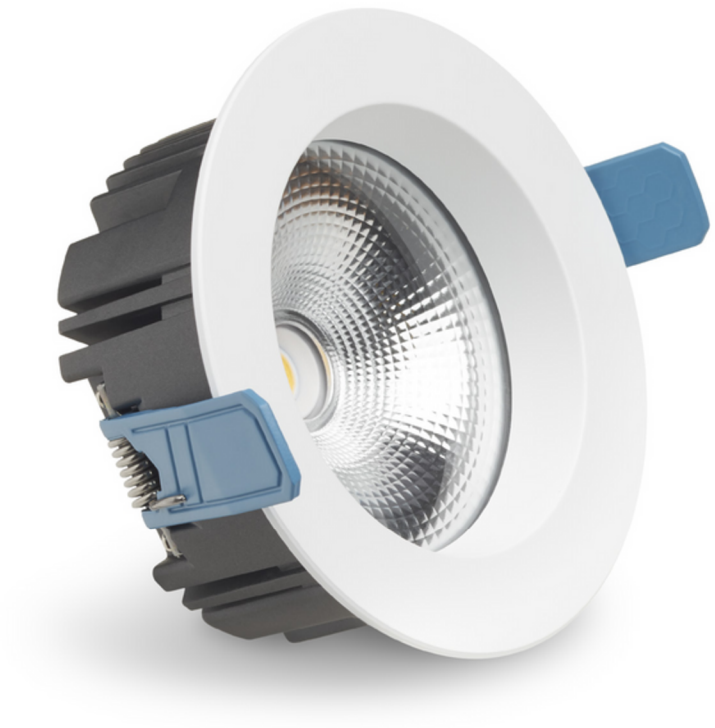

FEATURES

- Shallow depth for limited ceiling height
- Commercial grade quality heat sink and installation springs
- IP44 or IP65 options available
- LM-80 certified COB LED chips
- Ripple free dimming prevents visible flickering
- Long life-span with low power consumption
- 5 Year Warranty
- DALI DT8 Colour Tuneable

tunable | 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**


Bell Downlight Range

DT8 Colour Tuneable

Everyday Series


LUMINAIRE SPECIFICATION

CUT OUT	DIAMETER	WATTAGE
Ø 90mm	Ø 106mm	10W, 12W, 15W
Colour Temperature	3000K, 4000K, 2700K-6000K	
Beam Angle	 90°	
IP Rating	IP44, IP65	
Fitting Colour	White, Black	
Dimmable	DALI	
Light Source Brand	Samsung COB	
Efficiency (lm/w)	90-110lm/w	
CRI	90 (95 Option)	



ORDER INFORMATION

	Output	Beam	CT	Colour
TN-BELL	10W 12W 15W	90°	3000K 4000K Tunable	White Black

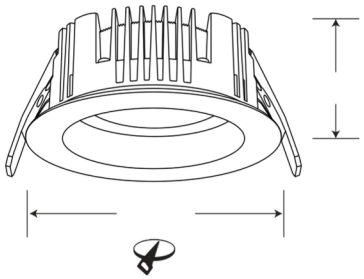

TECHNICAL SPECIFICATION

Driver Supplied	Boke DWL Series
Rated Voltage	220-240VAC 50-60Hz
Working Temp	25 ~ +45℃
in Rush Current	5A 50µs
Thermal Protection	C.5.a.
Body Material	Aluminium

STANDARDS COMPLIANCE

EN61347-1 • EN61347-2-13 • EN62384
EN55015 • EN61000-3-2 • EN61000-3-3 • EN61000-4-2,3,4,5,6,8,11 • EN61547
IEC 62386-101 • IEC 62386-102 • IEC 62386-207 • IEC 62386-209
IEC 61347-2- 13 Annex J • EN 60598-2-22 • EN 50172

5 YEARS WARRANTY
5% FAILURE RATE

tunable | 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**