Tunable Chelon

Retractable Downlight Series



FEATURES

- Retractable Adjustable can light in a recessed fitting body
- Superior UGR, CRI & SDCM
- Commercial grade quality heat sink
- Ripple free dimming prevents visible flickering
- Adjustable Tilt Design
- High efficiency COB LED chip

tunable | Level 1, 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**

Tunable Chelon


Retractable Downlight Series

LUMINAIRE SPECIFICATION	
Dimming	DALI, On/Off
Light Source	COB
Efficiency (lm/w)	111 lm/w
Colour Temperature	2700K, 3000K, 4000K
CRI	90
UGR Rating	<18
SDCM	1
IP Rating	IP44
Cut Out	Ø 90 mm
Installation	Recessed

TECHNICAL SPECIFICATION	
Driver Supplied	BOKE
Driver Location	Remote
Input Voltage	AC220-240V
Rated Hours	> 50,000hrs
Working Temp	-25°C~+50°C

ORDER INFORMATION

Wattage	Beam	CT	Finish
10W	24°	2700K	White
15W	36°	3000K	Black
18W		4000K	

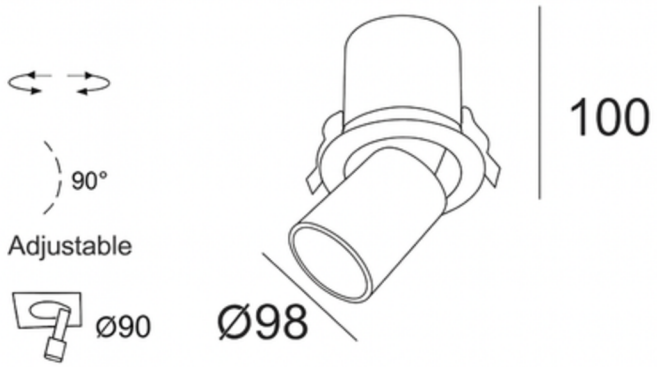



STANDARDS COMPLIANCE

EN61347-1 • EN61347-2-13 • EN62384
EN55015 • EN61000-3-2 • EN61000-3-3 • EN61000-4-2,3,4,5,6,8,11 • EN61547
IEC 62386-101 • IEC 62386-102 • IEC 62386-207 • IEC 62386-209
IEC 61347-2- 13 Annex J • EN 60598-2-22 • EN 50172

5 YEARS WARRANTY
5% FAILURE RATE

tunable | Level 1, 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**