Tunable Esuna

Trimless Series



FEATURES

- Gyprock Trimless Installation Ring
- Commercial grade quality heat sink
- Ripple free dimming prevents visible flickering
- Fixed Beam Design
- High efficiency CREE LED chip
- Adjustable tilt design

tunable | Level 1, 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**

Tunable Esuna


Trimless Series

LUMINAIRE SPECIFICATION	
Dimming	DALI, On/Off
Light Source	COB
Efficiency (lm/w)	119 lm/w
Colour Temperature	2700-6500K, 3000K, 4000K
CRI	90
UGR Rating	<19
SDCM	3
IP Rating	IP44
Cut Out	Ø 85mm
Installation	Trimless Recessed

TECHNICAL SPECIFICATION	
Driver Supplied	BOKE
Driver Location	Remote
Input Voltage	AC220-240V
Rated Hours	> 50,000hrs
Working Temp	-25°C~+50°C

ORDER INFORMATION

Wattage	Beam	CT	Finish
5W	15°	3000K	White
10W	24°	4000K	Black
	36°	Tunable	
	60°		

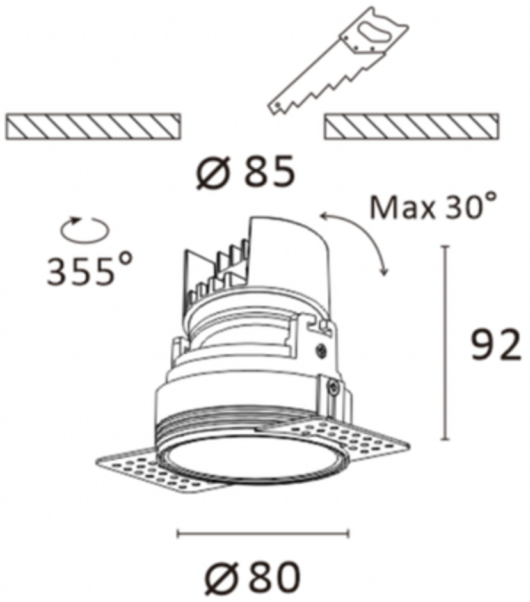



tunable | Level 1, 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**