Tunable Geber

Waterproof Downlight Series



FEATURES

- Waterproof Driver Box
- Cast Aluminium housing & mounting rings
- Commercial grade quality heat sink
- Ripple free dimming prevents visible flickering
- Adjustable Tilt Design
- High efficiency COB LED chip
- DALI DT8 Colour Tuneable

tunable | Level 1, 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**

Waterproof Downlight Series

LUMINAIRE SPECIFICATION	
Dimming	DALI, On/Off
Light Source	COB
Efficiency (lm/w)	100 lm/w
Colour Temperature	2700K-6500K, 3000K, 4000K
CRI	90
UGR Rating	<19
SDCM	3
IP Rating	IP65
Cut Out	Ø 83mm
Installation	Recessed

TECHNICAL SPECIFICATION	
Driver Supplied	Included
Driver Location	Remote
Input Voltage	AC220-240V
Rated Hours	> 50,000hrs
Working Temp	-25°C~+50°C


ORDER INFORMATION

Size	Wattage	Beam	CT	Finish
Small	6W 10W	24° 36° 60°	3000K 4000K Tunable	White Black
Large	15W			



Small

6W / 10W

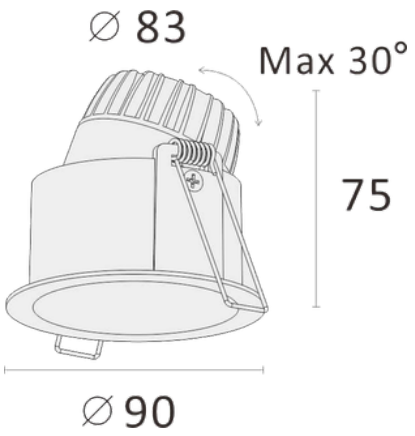

Large

15W

