Tunable Geber Mini

Downlight Series



FEATURES

- Smaller compact design compared to Geber
- Cast Aluminium housing & mounting rings
- Anti-rust powder coat
- Commercial grade quality heat sink
- Ripple free dimming prevents visible flickering
- Adjustable Tilt Design
- High efficiency COB LED chip
- DALI DT8 Colour Tuneable

tunable | Level 1, 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**

Tunable Geber Mini

Downlight Series

LUMINAIRE SPECIFICATION


Dimming	DALI, On/Off
Light Source	COB
Efficiency (lm/w)	90lm/w - 110lm/w
Colour Temperature	2700K-6500K, 3000K, 4000K
CRI	90
UGR Rating	<19
SDCM	3
IP Rating	IP44
Cut Out	Ø 65mm
Installation	Recessed

TECHNICAL SPECIFICATION

Driver Supplied	BOKE
Driver Location	Remote
Input Voltage	AC220-240V
Rated Hours	> 50,000hrs
Working Temp	-25°C~+50°C

ORDER INFORMATION

Wattage	Beam	CT	Finish
6W 10W 15W	15° 24° 36° 50°	3000K 4000K Tunable	White Black

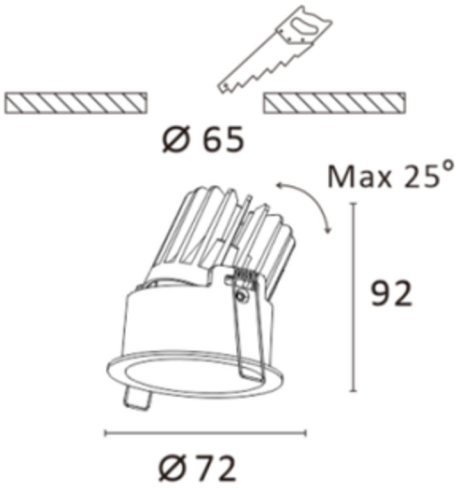



STANDARDS COMPLIANCE

EN61347-1 • EN61347-2-13 • EN62384
EN55015 • EN61000-3-2 • EN61000-3-3 • EN61000-4-2,3,4,5,6,8,11 • EN61547
IEC 62386-101 • IEC 62386-102 • IEC 62386-207 • IEC 62386-209
IEC 61347-2- 13 Annex J • EN 60598-2-22 • EN 50172

5 YEARS WARRANTY
5% FAILURE RATE

tunable | Level 1, 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**