Tunable Hopper

Surface Series



FEATURES

- Die-cast Aluminium housing
- IP44 for Indoor Installations
- Ripple free dimming prevents visible flickering
- Remote or Integral DALI Drivers
- High efficiency CREE LED chip

tunable | 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**


Tunable Hopper

DT8 Colour Tuneable

Surface Series

LUMINAIRE SPECIFICATION

Dimming	DALI, On/Off
Light Source	COB
Efficiency (lm/w)	112 lm/w
Colour Temperature	3000K, 4000K
CRI	90
UGR Rating	<19
SDCM	3
IP Rating	IP44
Diameter	Ø 125mm
Installation	Surface Mount

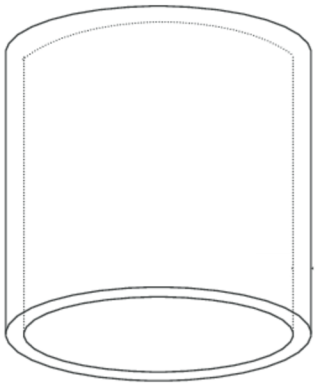

ORDER INFORMATION

	Output	Beam	CT	Colour
TN-HOP	15W 25W	24° 45°	3000K 4000K	White Black

TECHNICAL SPECIFICATION

Driver Supplied	TCI
Driver Location	Integral or Remote
Input Voltage	AC220-240V
Rated Hours	> 50,000hrs
Working Temp	-25°C~+50°C



STANDARDS COMPLIANCE

EN61347-1 • EN61347-2-13 • EN62384
EN55015 • EN61000-3-2 • EN61000-3-3 • EN61000-4-2,3,4,5,6,8,11 • EN61547
IEC 62386-101 • IEC 62386-102 • IEC 62386-207 • IEC 62386-209
IEC 61347-2- 13 Annex J • EN 60598-2-22 • EN 50172

5 YEARS WARRANTY
5% FAILURE RATE

tunable | 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**