Tunable Hyperion 6

Neon Flex



FEATURES

- 3-Step MacAdam
- One LED Bin supply
- High Density LED for uniform output
- 50,000h Long-Life LED
- Available in both IP20 & IP65
- Versatile application with LED Profile (sold separately)
- DC24V LED Strip
- DALI DT8 Colour Tuneable

Tunable Hyperion 6

Neon Flex

LUMINAIRE SPECIFICATION


Size	6x12mm
Colour Temperature	2700K, 3000K, 4000K, 2700K-6000K
Cutting Size	50mm
IP Rating	IP67
Bending Type	Horizontal
Voltage	24V
Dimming	DALI
SDCM	3
Efficiency (lm/w)	27-36lm/w
CRI	90

MOUNTING OPTIONS

Aluminium Profile

Available in 1m, 2m & 3m lengths






Stainless-Steel Clips

0.8mm Wide Mounting Clips





ORDER INFORMATION

	Output	Bend	CT	Cable
TN-DEIM	5W 10W	Horizontal	2700K 3000K 4000K Tunable	Front Side Bottom

CABLE FEED OPTIONS



Front Cable Entry




Side Cable Entry




Bottom Cable Entry


DIMENSION SPECIFICATION



Min bending diameter



Unit: mm
Cross section

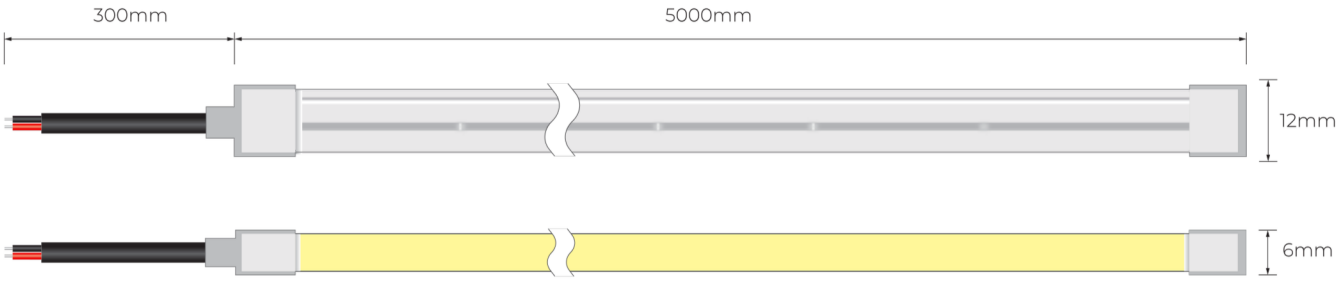

tunable | 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**