# Tunable Locke

## Track Series



## FEATURES

- 4 Wire Track Adaptors suitable for 1 Circuit Track
- DALI-2 Dimming via slimline Track Adaptor
- Available in 3 Sizes with 355° Rotation
- Commercial grade quality heat sink
- Ripple free dimming prevents visible flickering
- UGR <12 for Low Glare Commercial Application
- High efficiency COB LED chip
- Suitable with Tunable DALI Track

**tunable** | Level 1, 60 Martin Place / Sydney NSW 2000 Australia
**T** +612 9127 7736 | **E** info@tunable.au | **tunable.au**

# Tunable Locke

## Track Series

### LUMINAIRE SPECIFICATION


| | |
|---|---|
| Dimming | DALI, On/Off |
| Light Source | CREE |
| Efficiency (lm/w) | 90 lm/w (S) 110 lm/w (M, L) |
| Colour Temperature | 3000K, 4000K |
| CRI | 90 |
| UGR Rating | <12 |
| SDCM | 3 |
| IP Rating | IP20 |
| Cut Out | Ø 50mm - Ø 70mm |
| Installation | Recessed |

### TECHNICAL SPECIFICATION


| | |
|---|---|
| Driver Supplied | Allooking |
| Track Circuits | Four Wires, One Circuit |
| Input Voltage | AC220-240V |
| Rated Hours | > 50,000hrs |
| Working Temp | -25°C~+50°C |

### ORDER INFORMATION


| Size | Wattage | Beam | CT | Finish |
|---|---|---|---|---|
| S | 10W<br>15W | 15°<br>24° | 3000K | White |
| M | 20W | 36° | 4000K | Black |
| L | 30W | 60° | | |

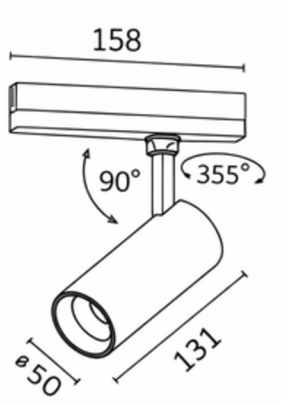


TN-LOC-S

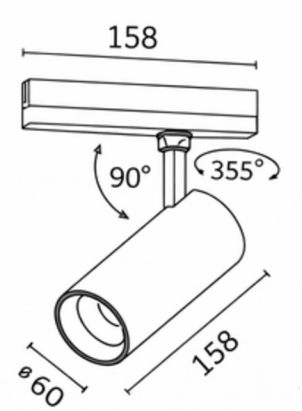


TN-LOC-M

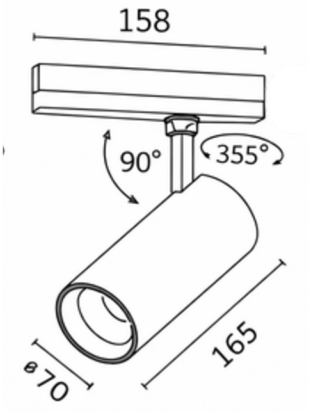


TN-LOC-L

### STANDARDS COMPLIANCE

EN61347-1 • EN61347-2-13 • EN62384
EN55015 • EN61000-3-2 • EN61000-3-3 • EN61000-4-2,3,4,5,6,8,11 • EN61547
IEC 62386-101 • IEC 62386-102 • IEC 62386-207 • IEC 62386-209
IEC 61347-2- 13 Annex J • EN 60598-2-22 • EN 50172

**5**
YEARS
WARRANTY
5% FAILURE RATE


**tunable** | Level 1, 60 Martin Place / Sydney NSW 2000 Australia
**T** +612 9127 7736 | **E** info@tunable.au | **tunable.au**