Tunable Mai

Linear Cell Series



FEATURES

- Available in 1x1, 1x2, 1x5, 1x10 & 1x15 Configurations
- Superior anti-glare effect
- Ideal for installations with energy saving concerns
- Ripple free dimming prevents visible flickering
- Available in DT8 Tunable White

tunable | Level 1, 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**

Tunable Mai

Downlight Series

LUMINAIRE SPECIFICATION


Dimming	DALI, On/Off
Light Source	High Power Cell
Efficiency (lm/w)	60 lm/w
Colour Temperature	2700K-6500K, 3000K, 4000K
CRI	90
UGR Rating	<19
SDCM	6
IP Rating	IP44
Cut Out	37mm x 37mm - 405mm
Installation	Recessed


TECHNICAL SPECIFICATION


Driver Supplied	BOKE
Driver Location	Remote
Input Voltage	AC220-240V
Rated Hours	> 50,000hrs
Working Temp	-25°C~+50°C


ORDER INFORMATION

Cells	Wattage	CT	Beam	Finish
1 Cell	2W	2700K 3000K 4000K Tunable	30° 45° 40°x 65°	White Black
2 Cells	4W			
5 Cells	10W			
10 Cells	20W			
15 Cells	30W			

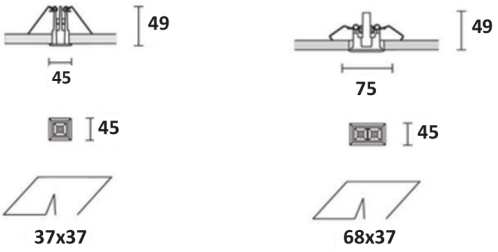







STANDARDS COMPLIANCE

EN61347-1 • EN61347-2-13 • EN62384
EN55015 • EN61000-3-2 • EN61000-3-3 • EN61000-4-2,3,4,5,6,8,11 • EN61547
IEC 62386-101 • IEC 62386-102 • IEC 62386-207 • IEC 62386-209
IEC 61347-2- 13 Annex J • EN 60598-2-22 • EN 50172

5
YEARS
WARRANTY
5% FAILURE RATE

tunable | Level 1, 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**