# Tunable Mallus

## Module Downlight



## FEATURES

- Low SDCM for higher colour uniformity
- UGR <19 for commercial grade installation
- 50,000hr Warranty
- High Lumen Output
- Ripple free dimming prevents visible flickering
- Long life-span with low power consumption
- High efficiency COB LED chip
- DALI DT8 Colour Tuneable

# Tunable Mallus


## Module Downlight


| LUMINAIRE SPECIFICATION | |
|---|---|
| Dimming | DALI, On/Off |
| Light Source | COB |
| Efficiency (lm/w) | 75 lm/w |
| Colour Temperature | 2700K-6500K, 3000K, 4000K |
| CRI | 90 |
| UGR Rating | <19 |
| SDCM | 3 |
| IP Rating | IP20 |
| Cut Out | Ø 50mm |
| Installation | Recessed |

| TECHNICAL SPECIFICATION | |
|---|---|
| Driver Supplied | BOKE |
| Driver Location | Remote |
| Input Voltage | AC220-240V |
| Rated Hours | > 50,000hrs |
| Working Temp | -25°C~+50°C |

### ORDER INFORMATION

| Wattage | Beam | CT | Finish |
|---|---|---|---|
| 12W<br>15W | 24°<br>36°<br>60° | 3000K<br>4000K<br>Tunable | White |

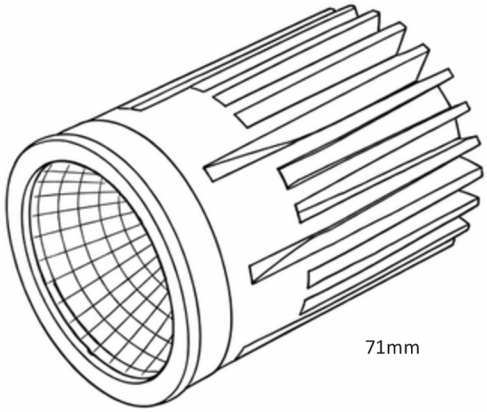

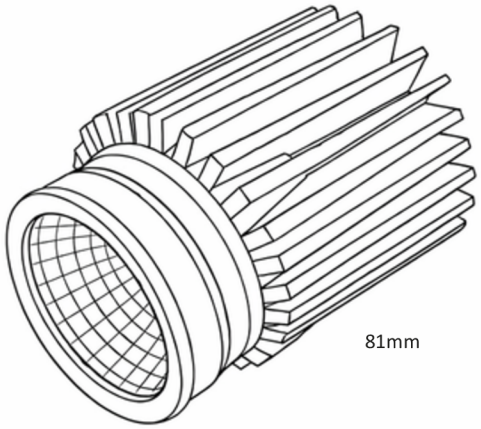
**tunable** | Level 1, 60 Martin Place / Sydney NSW 2000 Australia
**T** +612 9127 7736 | **E** info@tunable.au | **tunable.au**