Tunable Marey

Garden Series





FEATURES

- Optional Spike Mounting available
- Slim Design
- Anti-glare recessed LED
- DALI Dimmable
- IP65 for Outdoor Installation, with Remote Driver
- Adjustable Tilt Angle

tunable | Level 1, 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**

Tunable Marey

Garden Series

LUMINAIRE SPECIFICATION


Dimming	On/Off, DALI
Light Source	COB
Efficiency (lm/w)	50 lm/w
Colour Temperature	2700K, 3000K, 4000K
CRI	90
UGR Rating	<19
SDCM	5
IP Rating	IP65
Cut Out	-
Installation	Spike, Surface

TECHNICAL SPECIFICATION

Driver Supplied	BOKE
Driver Location	Remote
Input Voltage	AC220-240V
Rated Hours	> 50,000hrs
Working Temp	-25°C~+50°C

ORDER INFORMATION

Wattage	CT	Beam	Finish
10W	2700K 3000K 4000K	30° 45° 60°	Aluminum Black

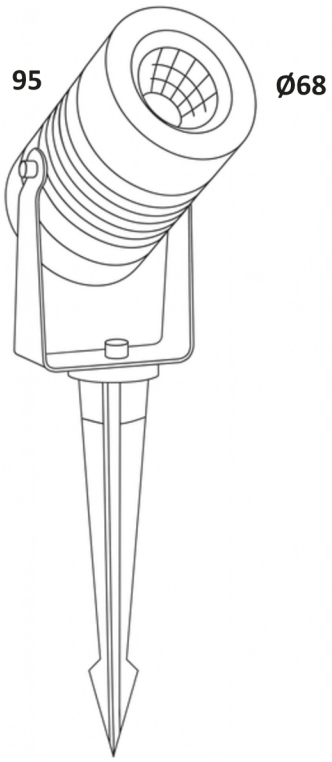

STANDARDS COMPLIANCE

EN61347-1 • EN61347-2-13 • EN62384
EN55015 • EN61000-3-2 • EN61000-3-3 • EN61000-4-2,3,4,5,6,8,11 • EN61547
IEC 62386-101 • IEC 62386-102 • IEC 62386-207 • IEC 62386-209
IEC 61347-2- 13 Annex J • EN 60598-2-22 • EN 50172

5 YEARS WARRANTY
5% FAILURE RATE

tunable | Level 1, 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**