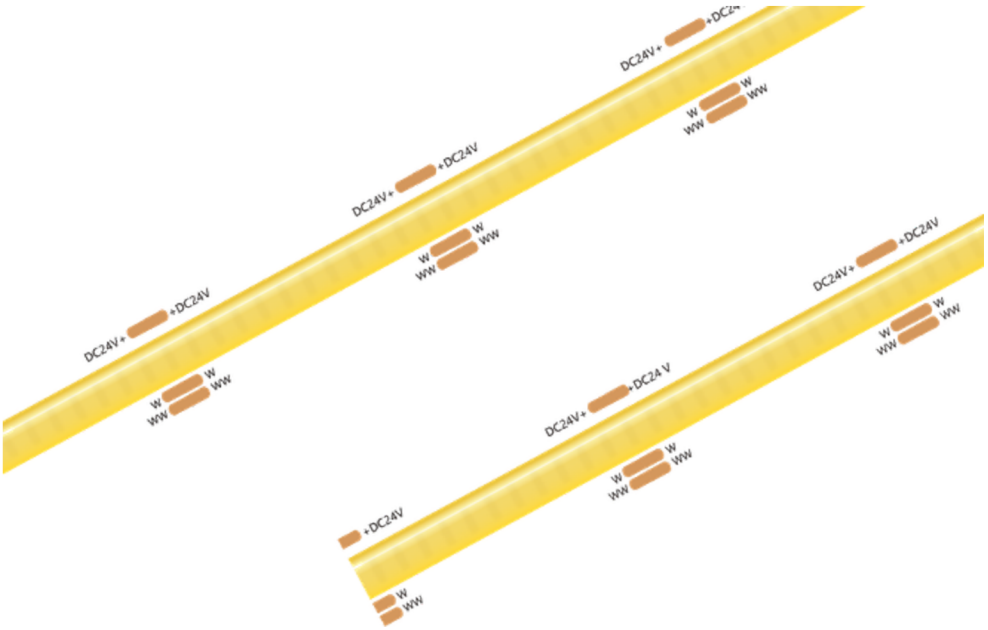
Tunable Oberon

COB LED Strip



FEATURES

- 3-Step MacAdam
- One LED Bin supply
- High Density LED for uniform output
- 50,000h Long-Life LED
- Available in both IP20 & IP65
- Versatile application with LED Profile (sold separately)
- DC24V LED Strip
- DALI DT8 Colour Tuneable & RGBW

tunable | 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**

Tunable Oberon

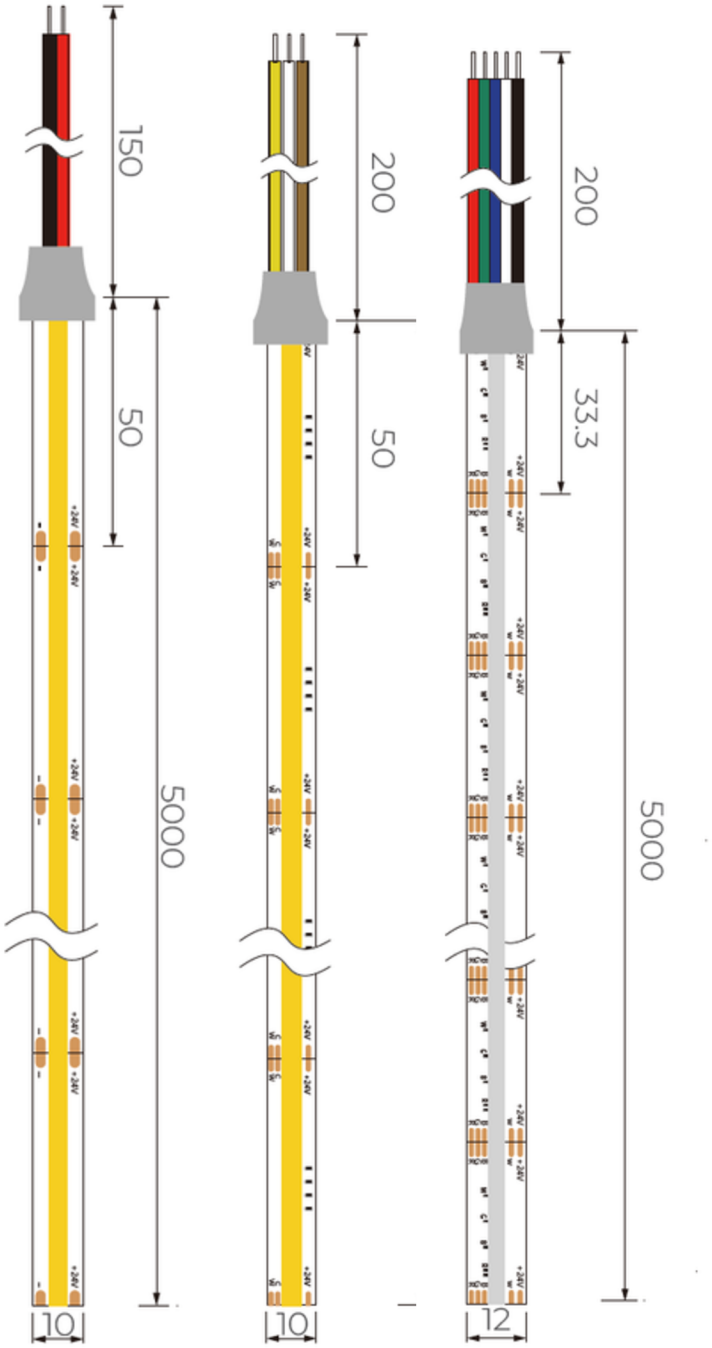
COB LED Strip

LUMINAIRE SPECIFICATION

Colour Temperature	2700K, 3000K, 4000K, RGBW, RGBTW, 2700-65000K
PCB Width	10mm | 12mm (RGBW)
Cutting Size	50mm | 33.3mm (RGBW)
IP Rating	IP20, IP65
SDCM	5 | 3 (Single Colour)
Voltage	24V
Dimming	DALI
Efficiency (lm/w)	107lm/w | 53 lm/w (RGBW)
CRI	90










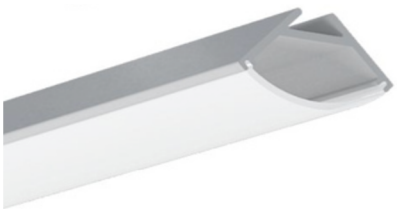


ORDER INFORMATION

Output	Colour Tempeature	IP Rating
5W 10W 15W	2700K 3000K 4000K	IP20 IP65
22W	Tunable	
16W	RGBW(3000K) RGBTW(2700-6500K)	



tunable | 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**

COB Tunable Series

	SURFACE MOUNT PROFILE	RECESSED PROFILE
	**Minima** 10x8mm 	Not available as recessed option
	**Plana** 17x7mm 	**Plana-R** 25x7mm 
	**Vexillum** 17x15mm 	**Vexillum-R** 21x16mm 
	**Magnus** 20x21mm 	**Magnus-R** 24x19mm 
	**Ingens** 35x35mm 	**Ingens-R** 35x35mm 
CORNER PROFILE		
	**Ora-S** 16x16mm 	**Ora-L** 19x19mm 

Available in 1M, 2M or 3M lengths

tunable | 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**