Tadao Panel Light Range

DT8 Colour Tuneable

Commercial Series





FEATURES

- UGR <19 & <22 Options
- 50,000hrs lifespan
- Back-Lit no light guide plate
- Ripple free dimming prevents visible flickering
- Integrated CCT Dial Switch (2700K/4000K/6500K)
- Optional Surface Mounting Frame available
- Aluminium frame & metal plate

tunable | 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**

Tadao Panel Light Range

DT8 Colour Tuneable

tunable


Commercial Series

LUMINAIRE SPECIFICATION

SKU	UGR Rating	WATTAGE
TN-TAD-X	<22 & <19	22W - 55W
Colour Temperature	CCT (2700K, 4000K, 6500K)	
Beam Angle	 120°	
IP Rating	IP20	
Fitting Colour	White	
Dimmable	Non-Dim, DALI	
Light Source Brand	CREE LED	
Efficiency (lm/w)	130lm/w	
CRI	80 (URG<22), 90 (UGR<19)	

ORDER INFORMATION

	UGR	Size	Dimming
TN-TAD	<22	595 x 595mm	On/Off
	<19	1195 x 295mm	DALI
		1195 x 595mm	

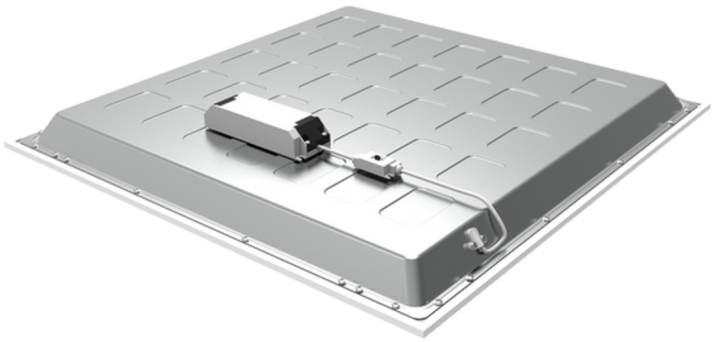

TECHNICAL SPECIFICATION

Driver Supplied	Integrated
Rated Voltage	220-240VAC 50-60Hz
Working Temp	25 ~ +60℃
in Rush Current	5A 50μs
Thermal Protection	C.5.a.
Body Material	Aluminium

STANDARDS COMPLIANCE

EN61347-1 • EN61347-2-13 • EN62384
EN55015 • EN61000-3-2 • EN61000-3-3 • EN61000-4-2,3,4,5,6,8,11 • EN61547
IEC 62386-101 • IEC 62386-102 • IEC 62386-207 • IEC 62386-209
IEC 61347-2- 13 Annex J • EN 60598-2-22 • EN 50172

5 YEARS WARRANTY
5% FAILURE RATE

tunable | 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**