Tunable Vander

Track Series



FEATURES

- Optional Honeycomb louver available
- Slimline OSRAM Track Adapter
- Fully rotatable 355° with additional 90° vertical adjustable
- High Anti-glare effect & Ripple Free Dimming
- RA 95 for High Colour Rendering
- Available in Single Colour, and Tunable White DT8

Tunable Vander

Track Series

LUMINAIRE SPECIFICATION


Dimming	DALI, DT8
Light Source	COB
Efficiency (lm/w)	80lm/w
Colour Temperature	3000K, 4000K, 2700-6500K
CRI	95
UGR Rating	<19
SDCM	2
IP Rating	IP20
Track Compatibility	Tunable 3 Circuit DALI
Installation	Track Mounted


TECHNICAL SPECIFICATION

Driver Supplied	OSRAM
Driver Location	Track Mounted
Input Voltage	AC220-240V
Rated Hours	> 50,000hrs
Working Temp	-25°C~+50°C

ORDER INFORMATION

Wattage	CT	Beam	Finish
10W 15W 20W 25W 30W	2700K 3000K 4000K Tunable	24° 36°	White Black

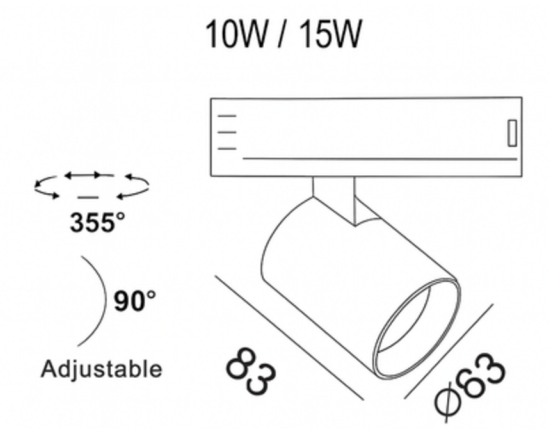

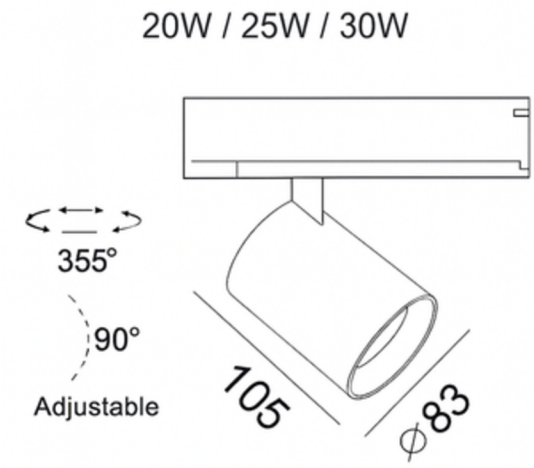

STANDARDS COMPLIANCE

EN61347-1 • EN61347-2-13 • EN62384
EN55015 • EN61000-3-2 • EN61000-3-3 • EN61000-4-2,3,4,5,6,8,11 • EN61547
IEC 62386-101 • IEC 62386-102 • IEC 62386-207 • IEC 62386-209
IEC 61347-2- 13 Annex J • EN 60598-2-22 • EN 50172

5 YEARS WARRANTY
5% FAILURE RATE

tunable | Level 1, 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**