Tunable Vinci

DT8 Colour Tuneable

Surface & Pendant Series



FEATURES

- Available in multiple sizes
- Die-cast Aluminium housing
- Optional Pendant Accessory for Suspension option
- IP65 for Indoor & Outdoor application
- Ripple free dimming prevents visible flickering
- Integral DALI Drivers
- High efficiency CREE LED chip

tunable | 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**

Tunable Vinci

DT8 Colour Tuneable

Surface & Pendant Series

LUMINAIRE SPECIFICATION


Dimming	DALI, On/Off
Light Source	COB
Efficiency (lm/w)	80 lm/w
Colour Temperature	3000K, 4000K, 2700-6500K
CRI	90
UGR Rating	<19
SDCM	4
IP Rating	IP65 (Driver IP20)
Diameter	Ø 100mm - 200mm
Installation	Surface Mount, Rod Suspension


ORDER INFORMATION

	Output	Beam	CT	Colour
TN-VIN-S	10W 15W	24° 36° 60°	3000K 4000K DT8	White Black
TN-VIN-M	20W 25W 30W			
TN-VIN-L	40W 50W 60W			


TECHNICAL SPECIFICATION

Driver Supplied	Lifud
Driver Location	Integral
Input Voltage	AC220-240V
Rated Hours	> 50,000hrs
Working Temp	-25°C~+50°C

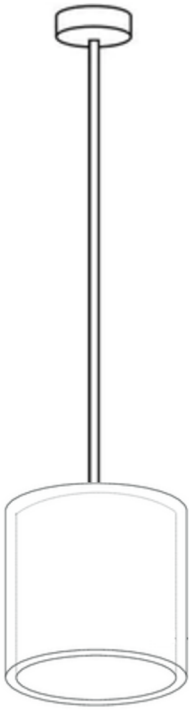

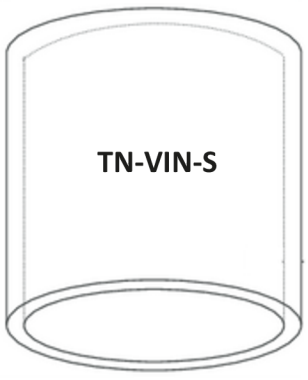



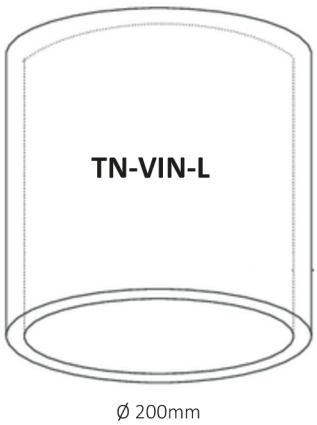

STANDARDS COMPLIANCE

EN61347-1 • EN61347-2-13 • EN62384
EN55015 • EN61000-3-2 • EN61000-3-3 • EN61000-4-2,3,4,5,6,8,11 • EN61547
IEC 62386-101 • IEC 62386-102 • IEC 62386-207 • IEC 62386-209
IEC 61347-2- 13 Annex J • EN 60598-2-22 • EN 50172

5 YEARS WARRANTY
5% FAILURE RATE

tunable | 60 Martin Place / Sydney NSW 2000 Australia
T +612 9127 7736 | **E** info@tunable.au | **tunable.au**